

**MAMMUT**



# Concrete Mixers



The Power  
Brand

# Cost effective concrete

Throughout the year there is a continual requirement for small and large maintenance and construction jobs around the house and agricultural premises. Taking delivery of small amounts of concrete is not economical, whilst self-mixing larger quantities of concrete permits more flexibility and saves money. The economic advantages are clearer if you have your own mixer that can also be used for mixing fodder, fertilizer or potting soil.

Support bar available as an accessory



## MAMMUT - a sturdy name that guarantees quality

Many concrete mixes require thorough mixing (anti-freezing, jointing compound, cement components ...) in order to ensure quality construction. All MAMMUT equipment meets this quality requirement. The aim is robustness and a long operational life for use on practical applications. For our mixers quality starts with the mixing unit with its spring-mounted, adjustable


mixing tines. They guarantee the best mixing and are "flexible" when meeting strong resistance. This quality philosophy continues with the robust oil immersed transmission via practical constructional elements such as a sack opener and support legs, to the wide range of equipment for individual requirements. The sides & base of the mixer are made of specially hardened steel.

*Treading softly  
Spring-mounted and adjustable mixing tines guarantee the best mix with little wastage*


*The heart of the mixer  
The robust oil immersed transmission with its excellent transmission ratio runs smoothly and without problem under load.  
The gearbox has a three-year warranty.*

*Work facilitation  
The 180° tilting discharge chute can be easily extended using quick release fasteners.  
You can therefore concrete large sections without re-positioning your tractor or stationary mixer*

*Universal  
Every mixer is provided with a number of hitching points to suit a variety of tractors. When laying concrete supporting legs allow connection to tractors with a low lift capacity.*

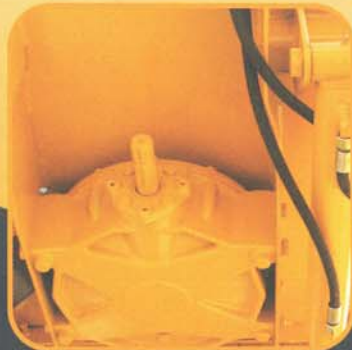

# From self loading mixer to industrial mixer

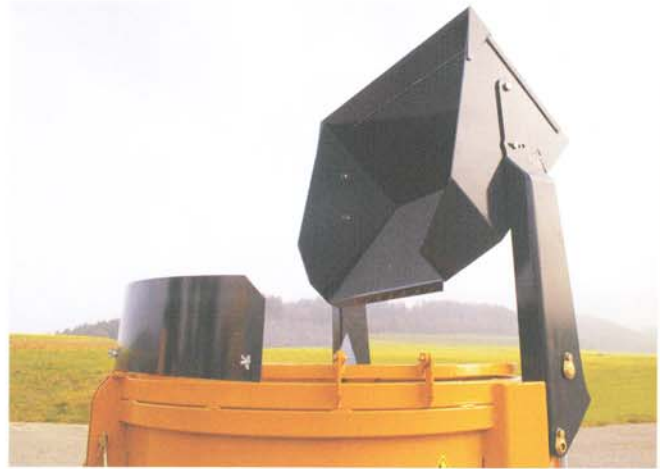

The 125 and 150 machines can also be supplied with their own loading shovel. These practical machines have a straightforward hydraulic loading shovel, which automatically tips the load into the drum when the shovel is raised.



## MAMMUT quality for industry

For individual requirements we produce our mixer designs in larger dimensions. Electrically or diesel driven stationary machines are used by the steel industry (mixing fireclay for furnaces) and for the food and animal feed industries. We also supply hydraulic oil motors for connection to construction site vehicles.

# Mobile unit for screed teams and construction companies

Better for corners

The highest quality mixture is simply not enough if compaction is incorrect

My MAMMUT compressed-air vibrating unit forces highly compacted concrete into every nook and cranny. It has a DN 7.2 standard coupling and an adjustable shut-off valve. You can select a 2 m or 3 m long hose. Accessories include a 10 m extension, an adaptor for claw couplings and bracket for vibrating tables.

Our trailer-mounted mixers are especially popular as everything a screed team needs can be towed economically by car. The TM95 can also be supplied as a stationary unit with a 4.5 kW electric motor and three spring-mounted mixing tines capable of handling 240 l of mix.



## Optional electrical motor

Our electrical drive is especially practical for all tractor concrete mixers. This means you are not reliant on your tractor, which can be deployed in the fields as required.



### Concrete mixer

Specification:	TM 95	TM 125	TM 150	TM 180	TM 200
Working capacity with concrete	240l	500l	750l	1000l	1200l
Capacity with lighter loads without light mix adaptor	320l	650l	940l	1200l	1400l
with light mix adaptor	—	850l	1230l	1500l	1720l
Drum diameter	950mm	1250mm	1500mm	1800mm	2000mm
Drum height	500mm	625mm	625mm	625mm	625mm
Weight approx.	280kg	350kg	450kg	510kg	580kg
Spring-mounted mixing tine	3	4	4	4	5
Output concrete approx.	4m <sup>3</sup> /h	8m <sup>3</sup> /h	13m <sup>3</sup> /h	15m <sup>3</sup> /h	17m <sup>3</sup> /h

### Self-loading concrete mixer

Specification::	TM 125SF	TM 150SF
Working capacity with concrete	500l	750l
Capacity with lighter loads without light mix adaptor	650l	940l
with light mix adaptor	—	—
Drum diameter	1250mm	1500mm
Drum height	600mm	600mm
Weight approx.	550kg	680kg
Spring-mounted mixing tine	4	4
Output concrete approx.	8m <sup>3</sup> /h	13m <sup>3</sup> /h

Subject to technical modification

Industrial machines are custom built with respect to dimensions, capacity and drive unit



# MAMMUT



MAMMUT MASCHINENBAU GES.M.B.H.  
A-4942 GURTEN - Rieder Straße 9 - Tel. +43(0)7757/6701 - Fax 6701-33  
e-mail: office@mammut.at - Internet: www.mammut.at